

NOTE: remove tab before using

PREMIUM CYCLE PACK FRONT & REAR LIGHT SET User's Guide

usa.zefal.com

PRODUCT INFORMATION | INSTRUCTIONS | CUSTOMER SERVICE

**For customer assistance call
800-278-2565**

Distributed by Todson, Inc., 4 Cocasset Street, Foxboro, MA 02035. Manufactured under EU, US, and international patents. The distinctive shapes, style, packaging, configurations and overall appearances of all Zefal products are trademarks of Zefal. Zefal is a registered trademark and exclusively licensed to Todson, Inc.



For maximum run times, please use premium brand batteries.


MADE IN CHINA
5165

REPLACING BATTERIES - LED TAIL LIGHT

Remove Cover:

Use coin or screwdriver blade to carefully pry red-tinted and silver cover off base.

After changing batteries reverse procedure and carefully line up cover and base and press firmly together.

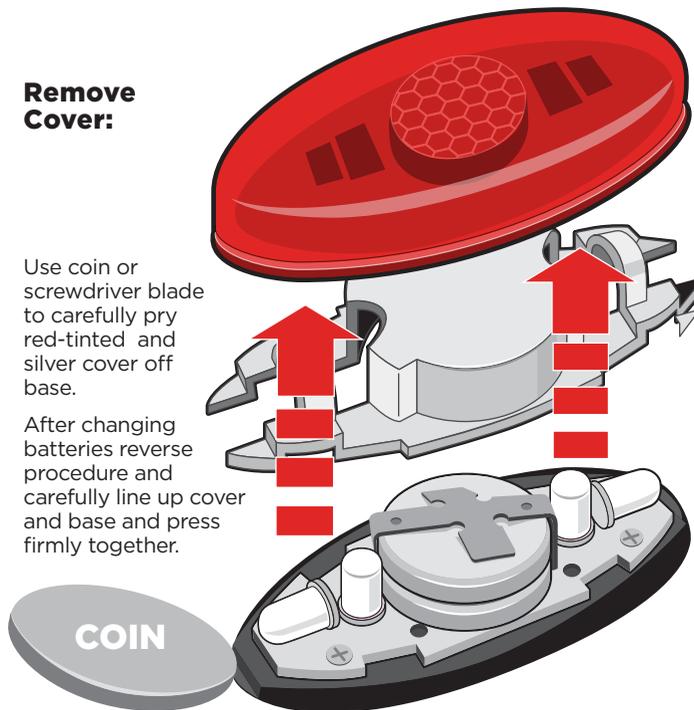


Remove and Replace Batteries


Batteries:
2 x CR2032

Note: Do not mix old and new batteries.

1. Slide out old batteries. Dispose of properly or recycle.
2. Use 2 CR2032 batteries. Stack both batteries with the POSITIVE (+) side up.
3. Slide 2 NEW batteries under contacts and replace cover as described above.

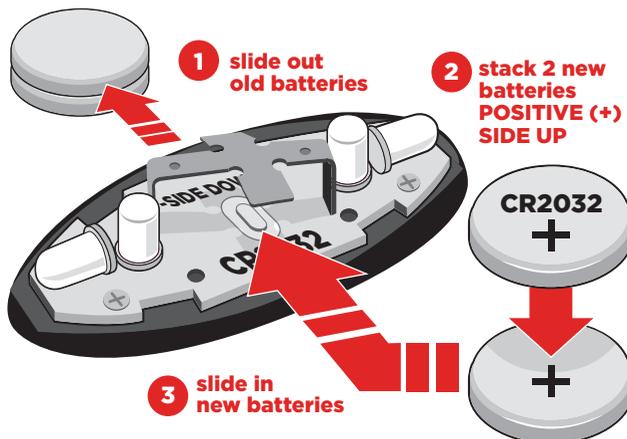

LED TAIL LIGHT USAGE

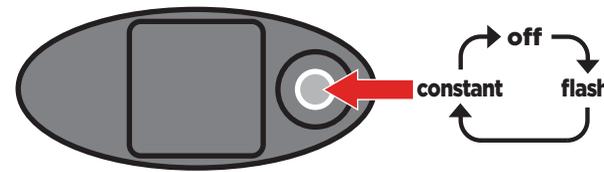


Press button to cycle through functions.

ATTACHING LIGHT TO SEAT PACK

1. Locate clip on back of light.
2. Locate the attachment strap on the pack.

clip

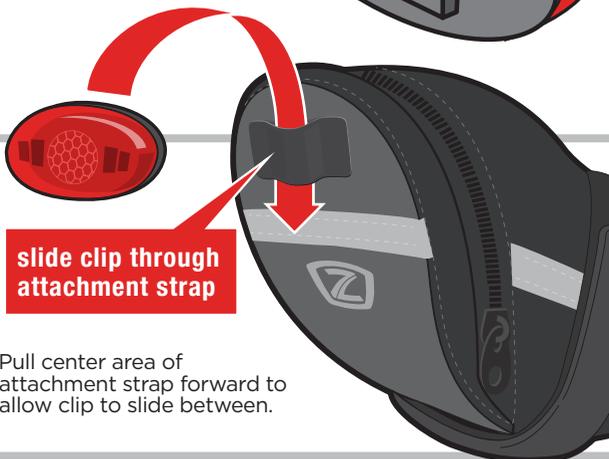

slide clip through attachment strap

3. Pull center area of attachment strap forward to allow clip to slide between.

4. Insert light and make sure it is fully inserted and secured with clip attached to strap.




PANTONE 485

BLACK

LED HEADLIGHT USAGE


1. The Zéfal LED Headlight is water-resistant. Although the light body is water-resistant (under normal weather conditions of rain, etc.) never intentionally submerge it under water.
2. If the light body or parts become dirty or have been exposed to any contaminants or dirt, gently clean with soft towel using mild soap and water only. Lubricate and maintain the light body with silicon based grease on the O-rings. Never use harsh chemicals to clean the lighting system as damage to the housing and lens will occur.
3. Safely and properly dispose of the old batteries according to your local regulations.
4. Never place this lighting system within a child's reach.
5. For ultimate safety, the Zéfal LED Headlight should be used in conjunction with a rear safety LED, reflectors, and possible additional front lighting deemed necessary.
6. Always wear an approved bicycle helmet, when riding.
7. Riding a bicycle at night is dangerous and could result in injury or possible death.
8. In addition to its brightness, the beam is widely diffused. In case you need to use this light on public roads, be sure to adjust the angle downward so as not to blind oncoming traffic.

BRACKET INSTALLATION

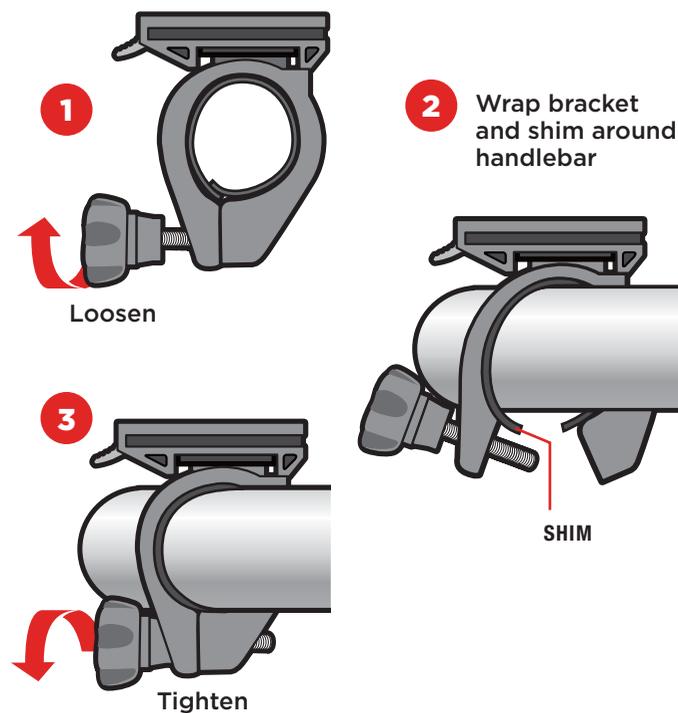


LED HEADLIGHT INSTALLATION

Light Removal

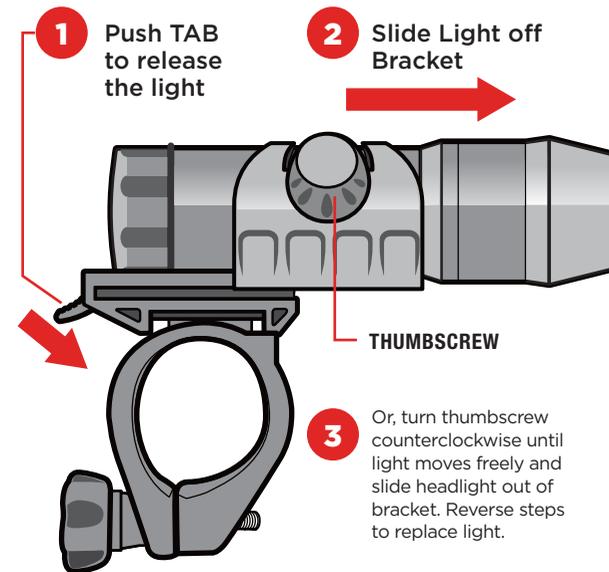

Light Mounting


Slide light onto bracket until it clicks into locked position.

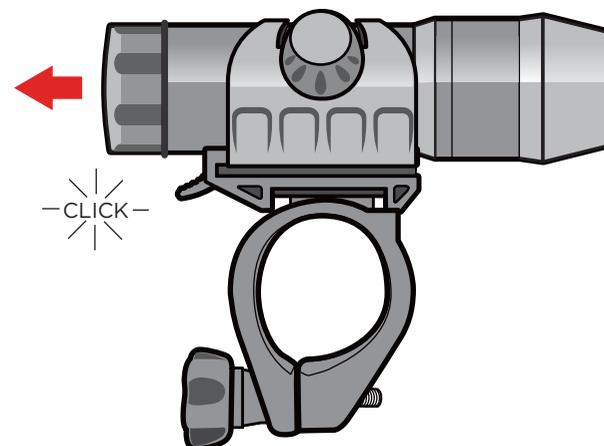


BATTERY INSTALLATION

Battery 3 x AAA (1.5V - LR3)

Note: Do not mix old and new batteries and do not mix alkaline, standard (carbon-zinc) or rechargeable (ni-cad, ni-mh, etc.) batteries

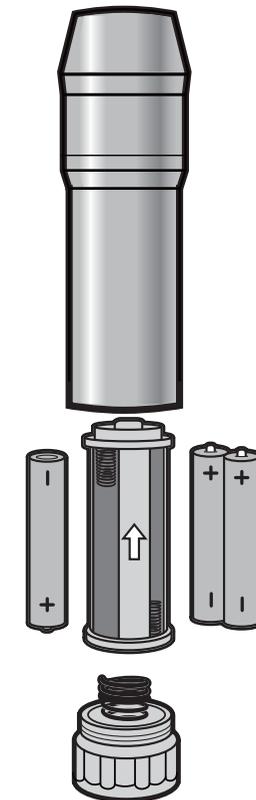


HEADLIGHT OPERATION

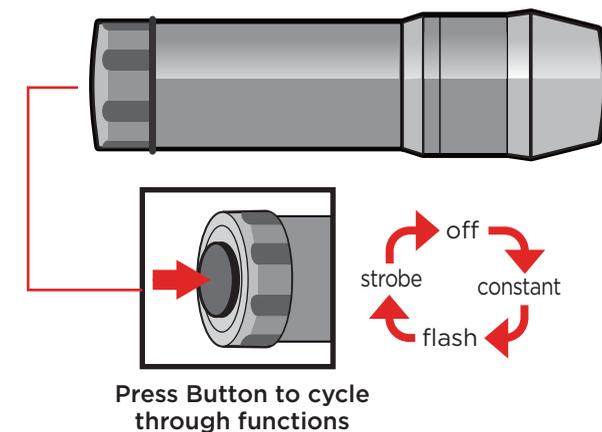


SEAT PACK INSTALATION INSTRUCTIONS


1. Position seat pack below seat and behind seat post.
2. Pull left top strap with buckle through left seat-support tubing.
3. Pull right top strap through right seat-support tubing and down alongside bag.
4. While supporting bag, pull front strap around seat post and thread thru buckle as shown.

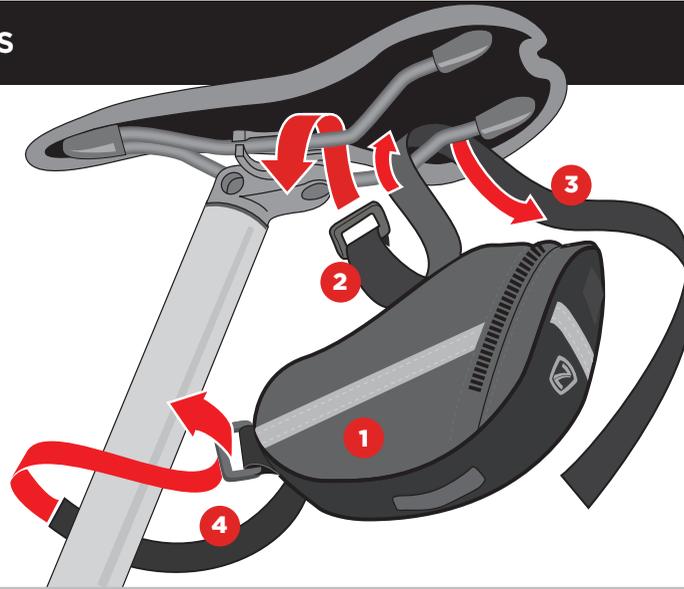

5. Tighten and secure front strap.
6. Thread right top strap through loop on underside of bag.

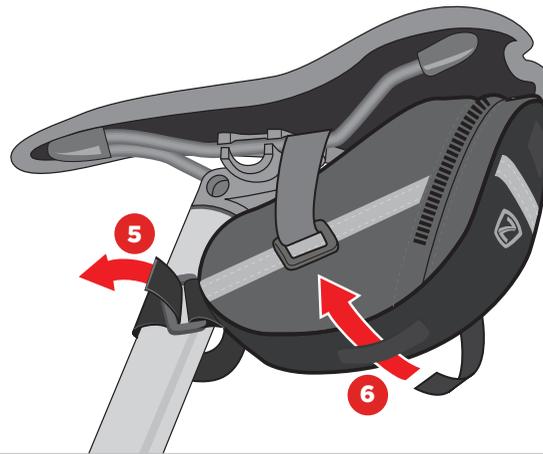

7. Thread right top strap through buckle as shown. Pull down and tighten.
8. Check all straps and adjust to tighten and secure bag to minimize movement while riding.
9. Bag is removable. Simply pull up straps to release. Remove bag.

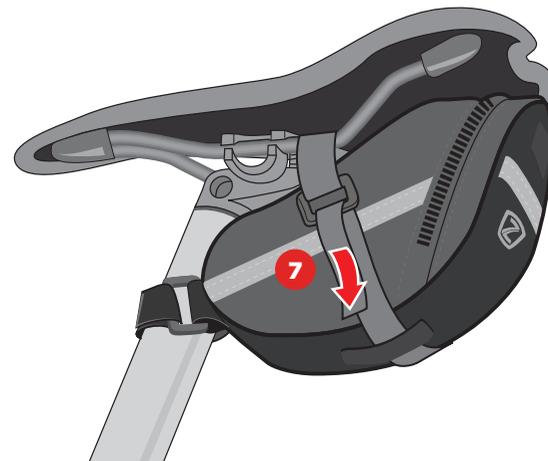

NOTE: Be sure to completely zipper compartment closed while riding so as to not loose contents of bag. Periodically check straps to ensure they are tight and secure.

Zéfal®

PREMIUM CYCLE PACK

WATER BOTTLE

BOTTLE CAGE

MINI PUMP

SEAT PACK

User's Guide

usa.zefal.com

PRODUCT INFORMATION | INSTRUCTIONS | CUSTOMER SERVICE

For customer assistance call
800-278-2565

Distributed by Todson, Inc., 4 Cocasset Street, Foxboro, MA 02035. Manufactured under EU, US, and international patents. The distinctive shapes, style, packaging, configurations and overall appearances of all Zefal products are trademarks of Zefal. Zefal is a registered trademark and exclusively licensed to Todson, Inc.



For maximum run times, please use
premium brand batteries.

MADE IN
CHINA
5165

PANTONE 485

BLACK

FULL A4 SHEET -SIDE 1

5165 Instruction SHEET 2

USING YOUR MINI PUMP

1 Identify Valve Stem Style


Compare your valve stem to illustrations at right.

Pump comes factory-set for Schrader valves.




2 Set the internals of the pump head to match the bicycle's valve

Unthread the cap on the pump head opening and remove the internal parts. Arrange the internal parts to match your valve type as shown at left. Insert the internal parts and thread the cap back onto the pump head.

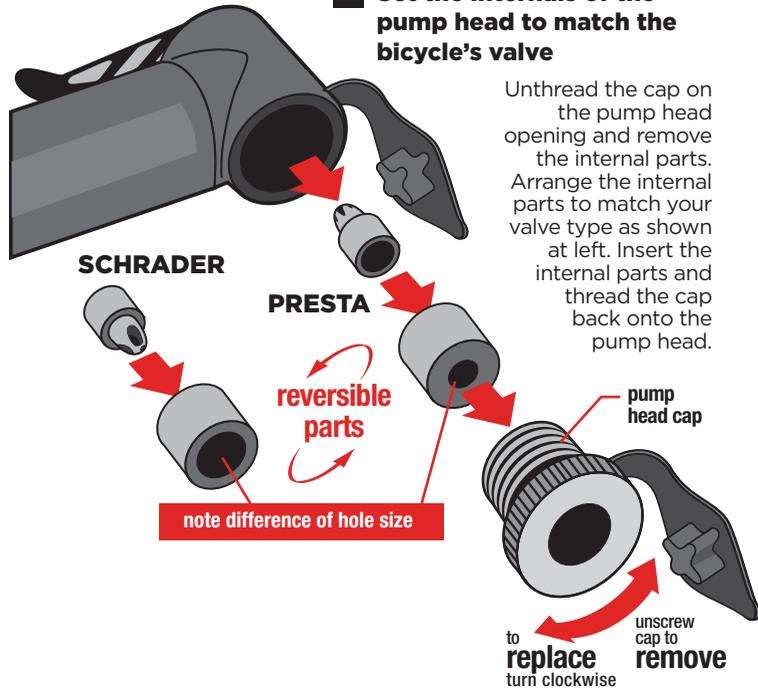


MINI PUMP BRACKET INSTALLATION

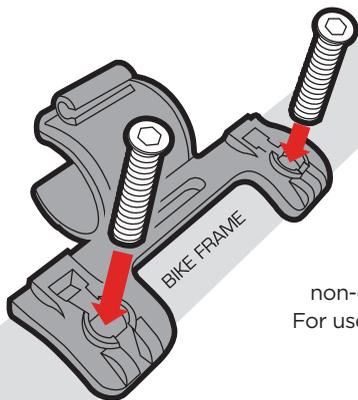

Use included screws to mount to frame using existing water bottle location on non-drive / left side of bicycle. For use with water bottle cages.


3 Release Handle

1. Rotate handle counter-clockwise as shown to release
2. Extend handle to inflate

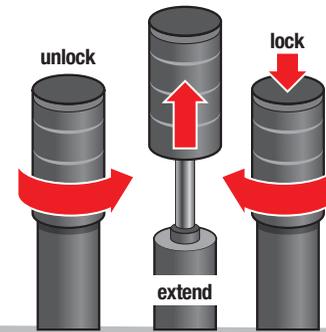

4 Inflate Tire

1. Open pump head cover
2. Slide pump head onto valve stem
3. Flip thumb lever into "locked" position
4. Pump tire to desired pressure (psi)
5. Flip thumb lever to "unlocked" position
6. Slide pump head off valve stem
7. Compress pump
8. Rotate handle clockwise to lock in closed position

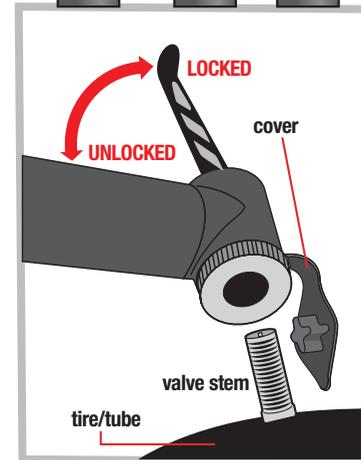

WATER BOTTLE

Bottle Care:

1. Hand wash with small amount of dishwashing soap and warm water.
2. Partially fill.
3. Screw cap on, shake a little.
4. Remove cap.
5. Rinse the bottle and cap to clean thoroughly.
6. Towel dry or store upside down on a drying rack to allow to properly air dry.
7. Leave the cap off while air-drying.

To Fill:

1. Remove top cap.
2. Fill with water, ice, sports drink, etc. (no carbonated beverages, as pressure will build and may cause leakage or spray during opening).
3. Replace cap.




WATER BOTTLE


Installation

This bottle cage will mount to the existing water bottle mounting holes on your bike's frame.

NOTE: An additional bracket may be needed if your bicycle does not have factory water bottle mounting holes.

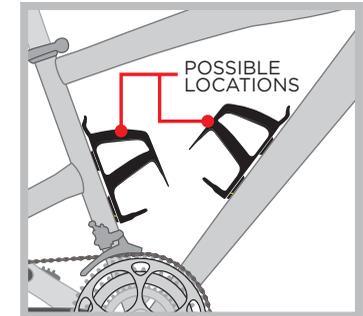

1. Remove existing screws in frame mounting holes.
2. Insert screws through the holes in the cage and thread into frame holes.

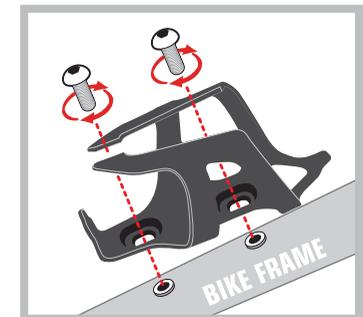

Be careful not to over-tighten the screws. Periodically check to make sure that the screws remain tight.

Operation of Bottle and Cage:

Once cage has been mounted on the bicycle:

1. Slide the bottle into the top of the cage and push down till the bottle is fully inserted.
2. Remove the bottle by pulling straight out of the cage opening.
3. Do not pull the bottle out at an angle as it may damage the bottle cage and loosen the fit of the cage and bottle.

